Brazed Heat Exchanger SFB50 Series





SonFlow Brazed Plate Heat Exchangers is the ideal choice suitable for a wide variety of applications across numerous markets segments.

Typical applications:

- General cooling/heating
- HVAC
- Refrigeration
- Industrial
- Marine
- Data centres
- Heat pump
- Solar heating


Features:

Every detail is carefully designed to ensure optimal performance:

- Compact design
- High flexibility
- Design pressure up to 40 bar
- Operating temperature: up to 185° C

Benefits:

- Lower operating costs
- Reduce life cycle cost
- Easy installation
- High thermal transfer efficiency
- Increased energy efficiency
- Low weight

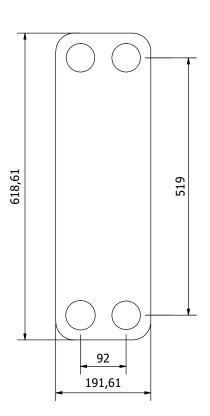



• Copper brazed: 25 and 40 bar (362 and 435 PSI)

Temperature:

-100 to 185°C (-148 til 365°F)

Construction standards:

• EN13445 (PED 2014/68/EU)

Connections:

- 2" pipe thread ISO7-R
- Ø 42,2 pipe for brazing

Number of plates (options):

 SFB51: 11, 15, 21, 31, 41, 51, 61, 71, 81, 91, 101, 111, 121, 131, 141, 151, 161, 171, 181, 191, 201

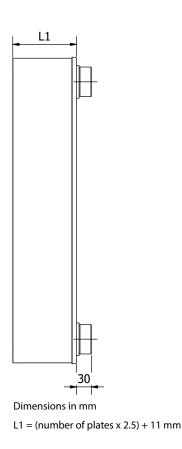




Plate material:

• AISI 316


Brazing material:

Copper

Accessories:

- Insulation jackets
- Foundation feet

PED Pressure/Temperature



09.2023

SonFlow A/S reserves the rights to change the specifications without prior notification.